RDM

Parameter ID	Command 'Discovery'	Command 'Set'	Command 'Get'
DISC_UNIQUE_BRANCH	√		
DISC_MUTE	√		
DISC_UN_MUTE	√		
DEVICE_INFO			√
SUPPORTED_PARAMETERS			√
SOFTWARE_VERSION_LABEL			√
DMX_START_ADDRESS		√	√
IDENTIFY_DEVICE		√	√
DEVICE_MODEL_DESCRIPTION			√
PARAMETER_DESCRIPTION			√
MANUFACTURER_LABEL			√
DEVICE_LABEL		×	×
FACTORY_DEFAULTS		√	√
BOOT_SOFTWARE_VERSION_ID			√
BOOT_SOFTWARE_VERSION_LABEL			√
DMX_PERSONALITY		√	√
DMX_PERSONALITY_DESCRIPTION			√
SLOT_INFO			√
SLOT_DESCRIPTION			√
SENSOR_DEFINITION			√
SENSOR_VALUE			√
DEVICE_HOURS			√
LAMP_HOURS			√
RESET_DEVICE		√	
CURVE		×	×
DMX STATE		×	×
DIMMER SPEED		×	×
"√"-executable command； "×"-to-be-updated command			

User Manual



AH023

Please read carefully before use

Please Note: Specifications and improvements in the design of this unit and this manual are subject to change without any prior written notice.

Packaging:Thanks for your purchasing the AH023 All the lights have been checked and are in excellent operating condition. Please check the shipping carton first,because there may be damage occurred during the shipment.Then check the lights carefully and be sure that the lights is intact and works normally.In the event damage has been found, spare parts are missing or the lights works abnormally,please contact us for further instructions. And please don't return the lights to the dealer before contacting us.


Introduction:The AH023 has three operating modes:DMX mode, Auto mode and Master/Slave mode.And the lights has five DMX modes,including channel 1,channel 2 , channel 5 and channel 10.Meanwhile, you can edit your desired Auto program in "EDIT"menu.In addition, you can connect several pieces of lights in DMX mode and set one in Auto mode, and the others in Master/Slave mode.And then all the lights in Master/Slave mode will run following the one in Auto mode.Using fog or special effect smoke,you can see better showing effect.

Warning!

1.Don't expose the lights to rain or moisture,for the sake of preventing the risk of electrical shock or fire.

2.Don't look directly at the opening lights all the time,or it may damage your eyes.

DIAGRAM I

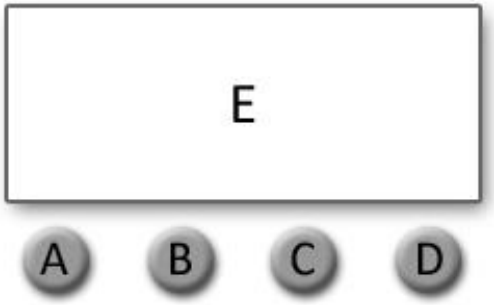


A. MENU
B. UP
C. DOWN
D. CONFIRM
E. DIGITAL DISPLAY WINDOW

10 CHANNELS		
Channel	**Value**	**Function**
1	000 - 255	**Master Dimmer**
2	000 - 255	Flash Duration
3	000 - 255	Flash Rate
4	000 - 255	Flash intensity
5	000 - 255	warm white（0%-100%）
6	000 - 255	amber （0%-100%）
7	000 - 255	warm white（0%-100%）
8	000 - 255	amber （0%-100%）
9	000 - 031	none
	032 - 255	auto 1-7
10	000 - 255	auto speed(Ch9) 8-255 strobe (Ch5-8)

Package Contents

- 1 x Power cable
- 1 x User manual
- 2 x Magnetic cover

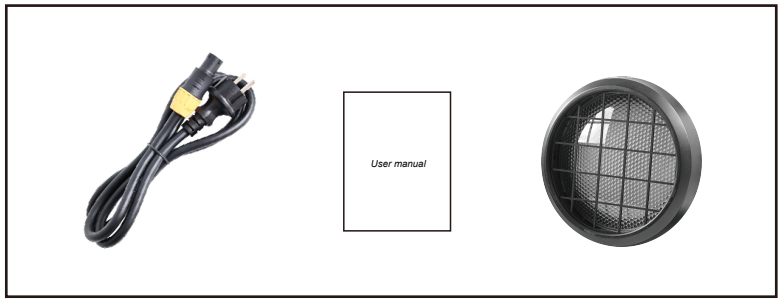

DMX control mode

1 CHANNELS		
Channel	**Value**	**Function**
1	000 - 255	Amber + Warm white

2 CHANNELS		
Channel	**Value**	**Function**
1	000 - 255	warm white（0%-100%）
2	000 - 255	amber （0%-100%）

5 CHANNELS		
Channel	**Value**	**Function**
1	000 - 255	Master Dimmer（0-100%）
2	000 - 255	warm white（0%-100%）
3	000 - 255	amber （0%-100%）
4	000 - 255	warm white（0%-100%）
5	000 - 255	amber （0%-100%）

Features

OPTIC
- LED: 2 X 150W LED,Amber 1700K+WW 2500K
- LED pixel control,with fast lock,turnable filter,display display inverted
- Beam angle: 50°
- CRI>90,TLCI>90

CONTROL & PROGRAM
- Channel: 01/02/05/10CH
- Protocal: DMX512, RDM
- Power connector:seetronic TRUE one connector IP65
- Data connector: 3 or 5PIN XLR
- Display: LCD Display

EFFECT
- 7 built in programs
- Strobe: 1 ~ 20Hz
- Dimming mode: 4 kinds

HOUSING
- Die-cast aluminum structure
- Waterproof fan for heat dissip

SOFTWARE
- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

POWER CONSUMPTION
- Voltage: AC 110V ~ 240V 50/60Hz
- Rated power: 350 W

OTHER
- IP rating: IP65
- Work environment: -40℃ ~ 45℃
- Startup environment: -20℃ ~ 45℃

SIZE & WEIGHT
- Size: 400 × 254 × 245 mm
- N.W: 8 kgs

Programme Menu

